

Fiber Optic Sensors



- Optical fiber amplifiers operated with automatic light compensation technology to effectively guarantee the stability of detection.
- Full range of optical fiber components can work as perfect replacement for popular models in the market.
- Customization is available according to the users' on-site applications.
- Abundant inventory, quick response and fast delivery.



PG1 Dual Digital Display Fiber Optic Amplifier

- With automatic light compensation technology, 4-channel anti-light interference
- Small hysteresis, dual output for option, the fastest speed up to 13 μs

P.A-04



PE1 Standard Dual Digital Fiber Amplifier

- Automatic light compensation technology and great adaptability for less maintenance.
- Six adjustable response speeds, up to 50μs small hysteresis ;
- High power mode for longer detection distances.

P.A-05



PC1 Ultra High Speed Response Dual Digital Display Fiber Optic Amplifier

- Fastest response time in the industry (15ms)
- Digital display of red and green lights for comparison, easy to set up
- Unique technology for light compensation, stable detection

P.A-07

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vision

Code Readers

Vibration

Temperature

Accessories

Guidance

Fiber amplifiers

Economical

Standard

Ultra high speed

Fiber components

Regular type

Array-type

Flat bracket type

Side-view type

High flexible type

High temperature resistant

Small spot type

Combination type

High end type

Fiber lens


Fiber lens



Regular Type

- Imported fiber optic core, wonderful performance
- Long sensing distance, cost-effective


P.A-08



Array-type

- Suitable for moving object detection
- To detect unclear position objects

P.A-12



Flat Bracket Type

- Flexible installation, easy to fix
- Suitable for limited space

P.A-14



Side-view Type

- To detect objects in narrow space
- Easy access to detected objects with high precision


P.A-15



High Elasticity Type

- Good performance with excellent flexibility
- After bending at angles of 90 degree, transmission ability only reduces 10%

P.A-16



High Temperature Resistant Type

- Heat resistant stainless steel jacket, strong chemical resistance
- Withstand temperatures up to 350°C.


P.A-17



Small Spot Type

- Built-in lens, small beam spot
- Customizable high-flex optical fiber cables

P.A-18



Combination Type

- Several fiber units combined together
- Customizable fiber length to tail your needs

P.A-19



High End Type

- Pioneering hot melt leveling technology
- Metal protective cap design

P.A-20



Lens

- Offering a full range specifications that can replace most of the popular products in the market
- Thru-beam and diffuse reflection types are optional.

P.A-20

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vision

Code Readers

Vibration

Temperature

Accessories

Guidance

Fiber amplifiers

Economical

Standard

Ultra high speed

Fiber components

Regular type

Array-type

Flat bracket type

Side-view type

High flexible type

High temperature resistant

Small spot type

Combination type

High end type

Fiber lens

Fiber lens

PG1 Dual Digital Display Fiber Optic Amplifier


- With automatic light compensation technology, 4-channel anti-light interference
- Small hysteresis, dual output selectable, the fastest speed up to 13 μs





Model No.	PG1-N (HOT)	PG1-P
Control output	1 output port	
Light source	Red, 4-element LED	
Response time	SHP: 13 μs, FINE: 30 μs, SUPR: 100 μs, MEGA: 200 μs	
Output selection	LIGHT-ON/DARK-ON (Short press MODE and select with UP DOWN)	
Display indicator	Operation indicator: Red LED, dual digital monitor: Dual 7-digit display, threshold (4-digit green LED body indicator) and current value (4-digit red LED body indicator) lit together. Current value range: 0-9999	
Detection method	Light intensity (area detection is available for automatic sensitive tracking)	
Delay function	1ms~9999ms	
Control output	NPN open collector, maximum 100mA, residual voltage: 1V	PNP open collector, maximum 100mA, residual voltage: 1V
Power supply	12~24V DC ± 10%	
Ambient illuminance	Incandescent lamp ≤ 20,000 lux, Sunlight ≤ 30000 Lux	
Power consumption	Standard mode: Max 300mW	
Vibration resistance	10~55Hz, double amplitude: 1.5mm, X, Y, Z axis are 2 hours respectively	
Ambient temperature	-10°C~+55°C, No freezing	

Dimensions

Unit: mm

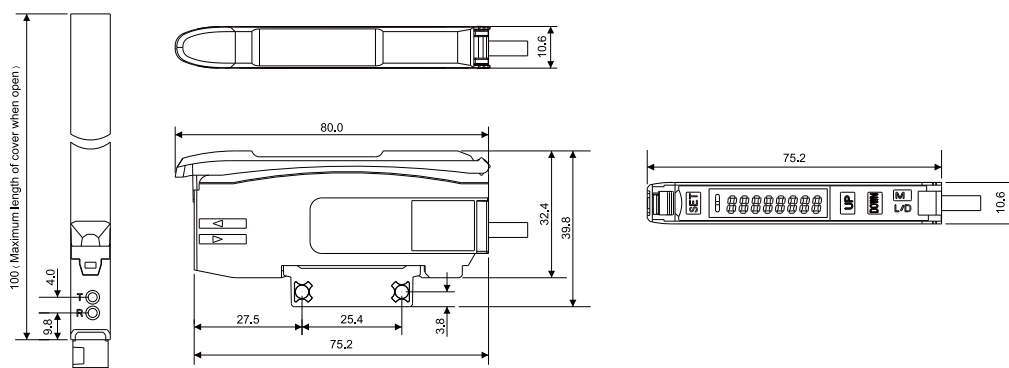

Circuit diagram

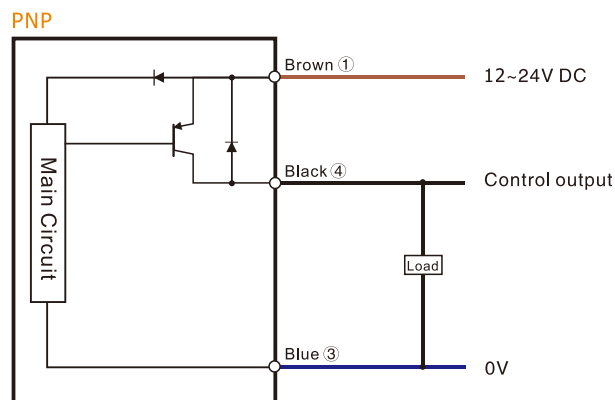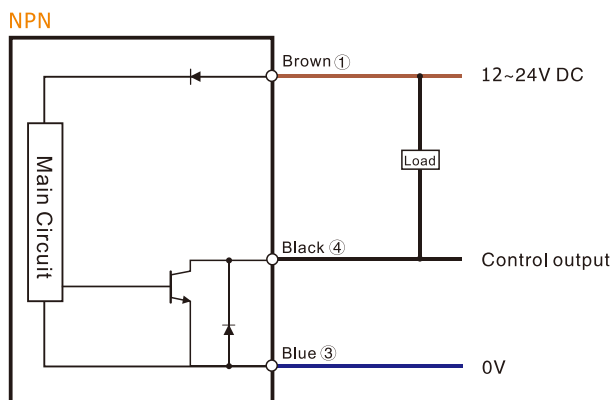

- Fiber Optic
- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Code Readers
- Vibration
- Temperature
- Accessories

Guidance

- Fiber amplifiers
- Economical
- Standard
- Ultra high speed

Fiber components

- Regular type
- Array-type
- Flat bracket type
- Side-view type
- High flexible type
- High temperature resistant
- Small spot type
- Combination type
- High end type

Fiber lens

- Fiber lens

PE1 Standard Dual Digital Fiber Optic Amplifier


- No more tedious operations, easy one-touch teaching;
- With automatic light compensation technology, great adaptability with less maintenance;
- Six adjustable response speeds, small hysteresis up to 50 μs.




Model	PE1-N	PE1-P
Light source	Red modulated light (650nm)	
Operating voltage	12-24V	
Operating current	40mA	
Output type	NPN open collector	PNP open collector
Switch type	L.on /D.on selectable	
Display	7 segment 8 digit display (red: 4 digit, green: 4 digit)	
Response time	50μs (HIGH SPEED)/250μs (FINE)/500μs (TURBO)/1 ms (SUPER)/4 ms (ULTRA)/16 ms (MEGA)	
Calculator function	Timer off, break delay, on delay, single (output delay method)	
Sensitivity adjustment	Teach-in adjustment, manual adjustment	
Hysteresis	≤20%SN	
Switch type	L.on /D.on selectable	
Indicator	Work indicator: green; Action indicator: red	
Leakage current	<1.5V (load current<100mA)	
Load current	100mA	
Circuit protection	Power reverse polarity protection / surge protection / short circuit protection	
Ambient temperature	Operating temperature: -20° C to +50° C No freezing, no condensation; storage: -30 to +70° C	
Ambient humidity	Operating: 35%~85%RH, no condensation; Storage: 35%~95%RH	
Insulation	20MΩ	
Pressure resistance	± 1000V 50/60Hz 60s	
Static electricity	± 8000V(Air discharge)	
Group pulse	± 2000V (5kHz/50kHz)	
Anti-vibration	10-50Hz amplitude 0.5mm,X Z Y three directions,2 hours each	
Ambient illuminance	Incandescent lamp: ≤3000lux / Sunlight: ≤10000 lux	
Degree of protection	IP50	
Housing material	PC	
Connector	2m 3 wire cable 4mm diameter	

Dimensions


Unit: mm

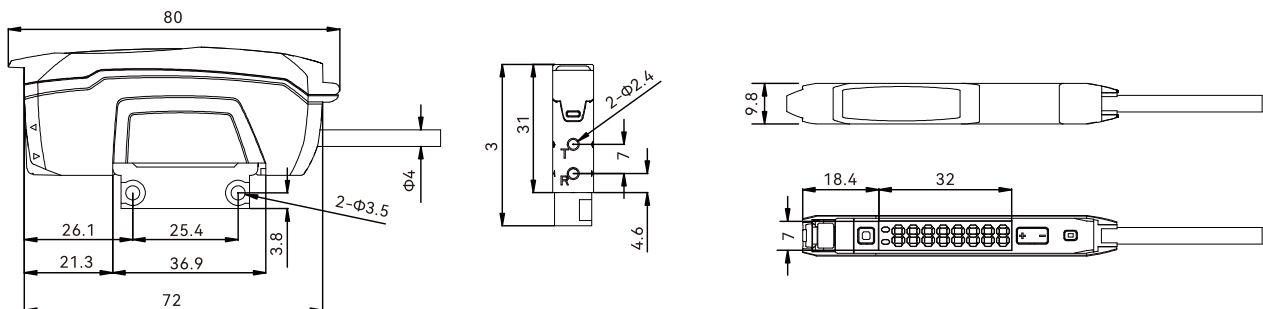

NPN

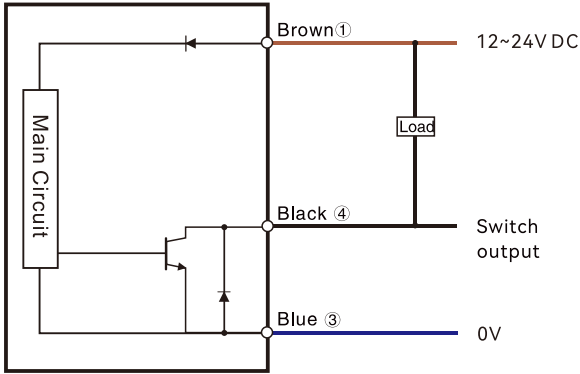

PNP

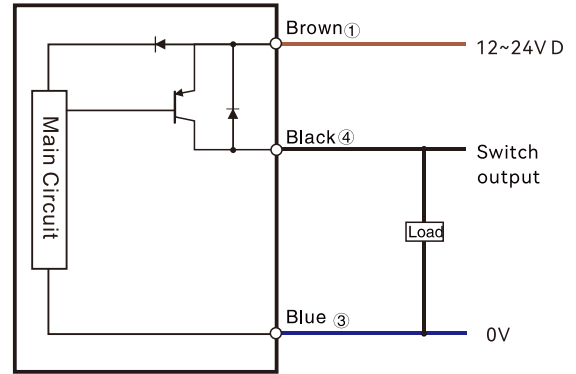

Fiber Optic

- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Code Readers
- Vibration
- Temperature
- Accessories

Guidance

Fiber amplifiers

- Economical
- Standard**
- Ultra high speed

Fiber components

- Regular type
- Array-type
- Flat bracket type
- Side-view type
- High flexible type
- High temperature resistant
- Small spot type
- Combination type
- High end type

Fiber lens

- Fiber lens


PC1 Ultra High Speed Response Dual Digital Display Fiber Amplifier

- Fastest response time in the industry (15ms)
- Digital display of red and green light in comparison, easy installation
- Unique technology for light compensation, stable detection




Model No.	PC1-NH	PC1-NH2	PC1-PH	PC1-PH2
Light source	Red LED 660nm			
Operating voltage	12~24V DC			
Current consumption	Standard mode: 36mA max.(Single output), 39mA max.(Dual output) Energy-saving mode: 25mA max.(Single output), 28mA max.(Dual output)			
Output type	Single output NPN	Dual output NPN	Single output PNP	Dual output PNP
Switch type	≤100mA / 30V DC, Load current≤100mA, Voltage drop≤1.8V, Normally open (L.on), normally closed (D.on)			
Switch type	Selectable L.on, D.on			
Indicator	Single output indicator (Red), dual output indicator (Orange)			
Display screen	7 segment 8 digit display (red: 4 digit, orange: 4 digit)			
Response time	15 μs(22us(1-HS)), 70 μs(2-FS), 250 μs(3-ST), 500 μs(4-LG), 1ms(5-PL), 2ms(6-UL), 8ms(7-EL)			
ON/OFF Time delay function	ON delay, OFF delay, Single pulse output, ON + OFF delay, ON delay+Single pulse output 0.1~9.999ms			
Sensing distance	Thru-beam: 4000mm, Diffuse reflection: 1200mm			
Sensitivity adjustment	Teach-in / Manual			
External input function	Remote teach-in, Input stops once it shines, Syn trigger input, reset-input (for two outputs only)			
Operating temperature	-25°C~+55°C			
Operating humidity	35%~85%RH			
Ambient illuminance	Sunlight≤10000lux, Incandescent lamp≤3000lux			
Anti-vibration	10~55Hz Double amplitude 1.5mm, XZY three directions, 2 hours each			
Shock resistance	50G(500m/S²), XYZ three directions			
Degree of protection	IP50			
Material	Housing: PPE, Display: PC			
Connection method	2m 5 core cable			
Weight	50g			

Dimensions

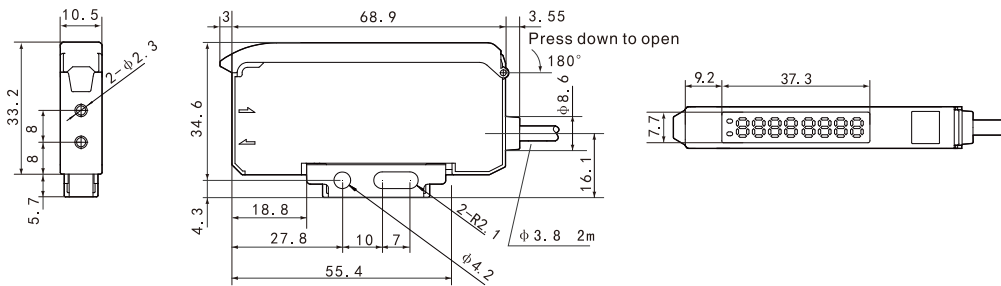

Unit: mm


Circuit diagram

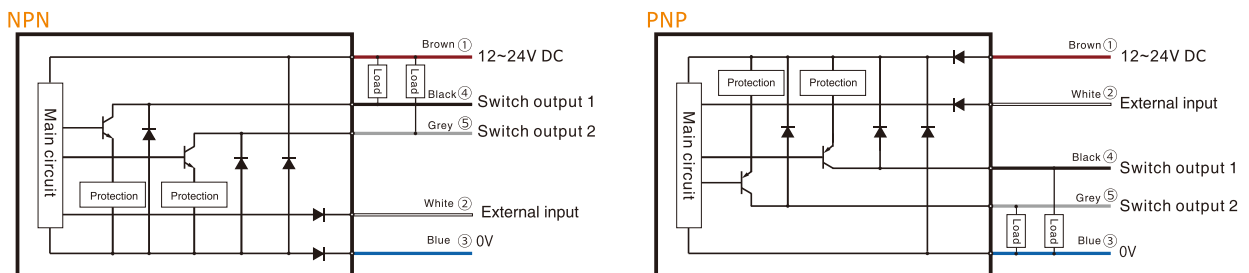

Note: Gray line (switching output 2) is only available for the dual channel type (PC1-NH2/PH2).

Diffuse reflection


PD-R49Y

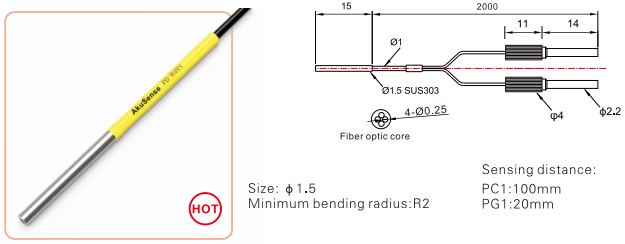

Size: $\phi 1.5$
Minimum bending radius: R2

Sensing distance:
PC1:100mm
PG1:20mm


PD-R46

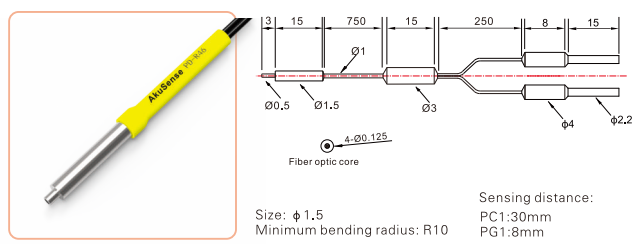

Size: $\phi 1.5$
Minimum bending radius: R10


Sensing distance:
PC1:30mm
PG1:8mm

PD-E22-Q-I/S/M/L

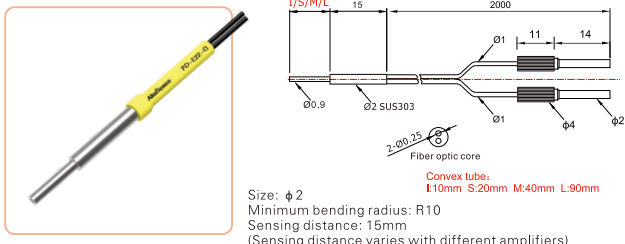

Size: $\phi 2$
Minimum bending radius: R10
Sensing distance: 15mm
(Sensing distance varies with different amplifiers)


PD-S32-Q

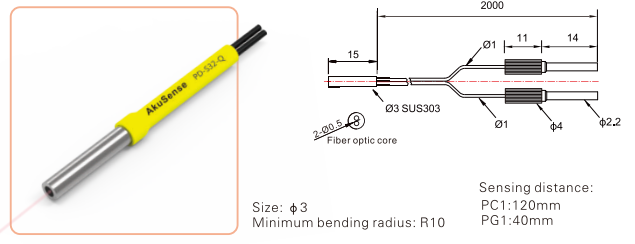

Size: $\phi 3$
Minimum bending radius: R10

Sensing distance:
PC1:120mm
PG1:40mm


PD-32

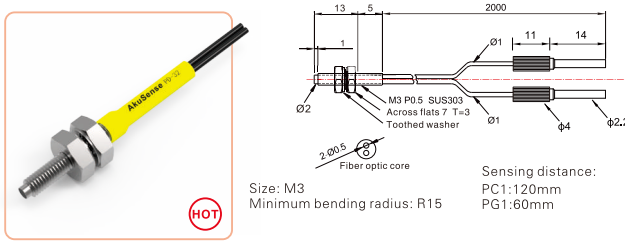

Size: M3
Minimum bending radius: R15

Sensing distance:
PC1:120mm
PG1:60mm


PD-32-I/S/M/L

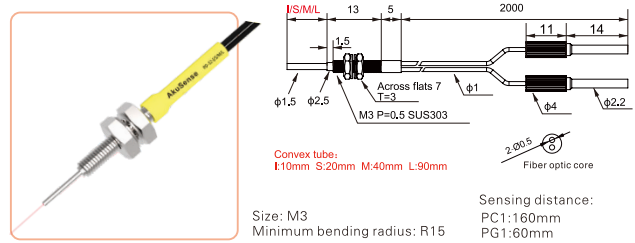

Size: M3
Minimum bending radius: R15

Sensing distance:
PC1:160mm
PG1:60mm


PD-E32

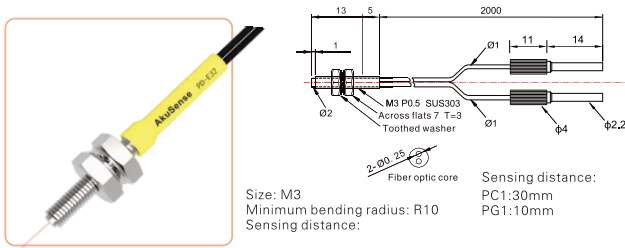

Size: M3
Minimum bending radius: R10
Sensing distance:

Sensing distance:
PC1:30mm
PG1:10mm


PD-E32-I/S/M/L

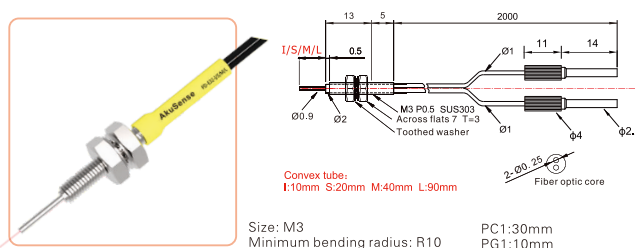

Size: M3
Minimum bending radius: R10

Sensing distance:
PC1:30mm
PG1:10mm


PD-42

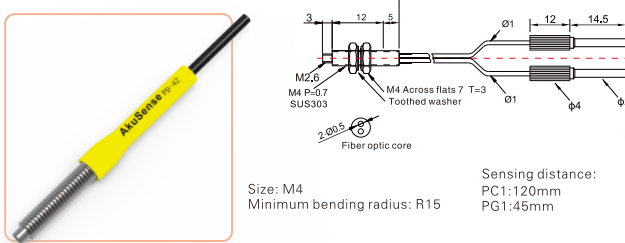

Size: M4
Minimum bending radius: R15

Sensing distance:
PC1:120mm
PG1:45mm

PD-42-I/S/M/L

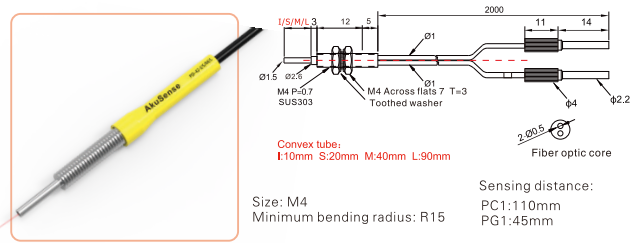

Size: M4
Minimum bending radius: R15

Sensing distance:
PC1:110mm
PG1:45mm

Fiber Optic
Slot Sensors
Photoelectric
Laser
Proximity
Displacement
Magnetic
Contact
Area
Ultrasonic
Vision
Code Readers
Vibration
Temperature
Accessories

Guidance
Fiber amplifiers
Economical
Standard
Ultra high speed


Fiber components
Regular type
Array-type
Flat bracket type
Side-view type
High flexible type
High temperature resistant
Small spot type
Combination type
High end type

Fiber lens
Fiber lens

*PG1: TEGA with a threshold setting of 200;
PC1: 7-step with a threshold setting of 200.
*Cable length listed above can be customized.

Diffuse reflection


PD-62

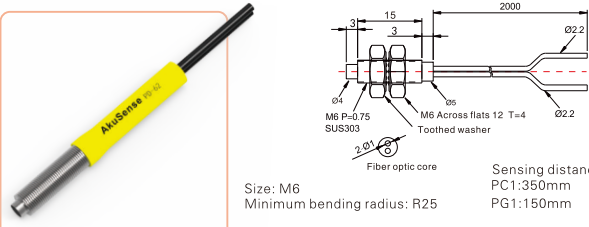

Size: M6
Minimum bending radius: R25

Sensing distance:
PC1:350mm
PG1:150mm

PD-62-I/S/M/L

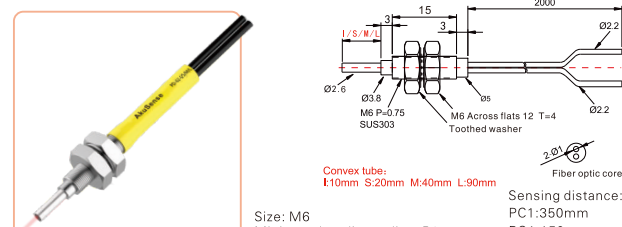


Convex tube:
I:10mm S:20mm M:40mm L:90mm

Size: M6
Minimum bending radius: R25

Sensing distance:
PC1:350mm
PG1:150mm

PD-L35GA


Coaxial

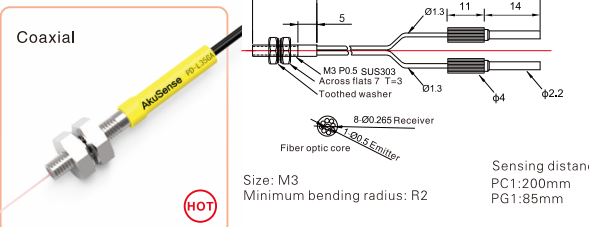

Size: M3
Minimum bending radius: R2

Sensing distance:
PC1:200mm
PG1:85mm

PD-G45Y

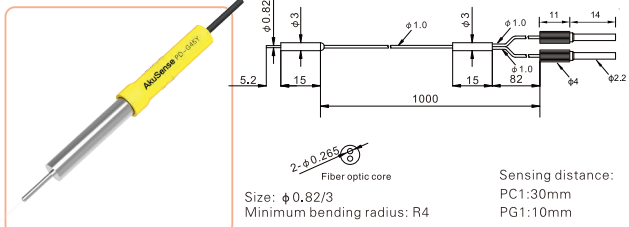


Size: $\phi 0.82/3$
Minimum bending radius: R4

Sensing distance:
PC1:30mm
PG1:10mm

PD-C310-35FA

Coaxial

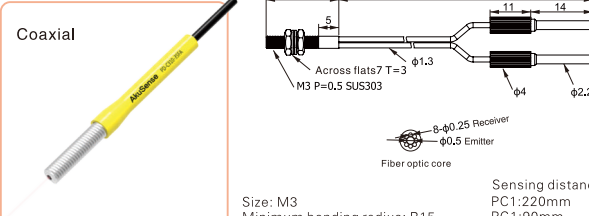


Size: M3
Minimum bending radius: R15

Sensing distance:
PC1:220mm
PG1:90mm

PD-C310-35FA-I/S/M/L

Coaxial




Convex tube:
I:10mm S:20mm M:40mm L:90mm

Size: M3
Minimum bending radius: R15

Sensing distance:
PC1:200mm
PG1:70mm

PD-C42

Coaxial

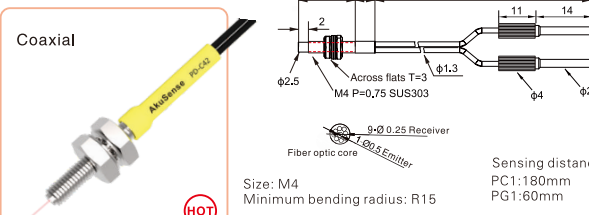


Size: M4
Minimum bending radius: R15

Sensing distance:
PC1:180mm
PG1:60mm

PD-C42-I/S/M/L

Coaxial

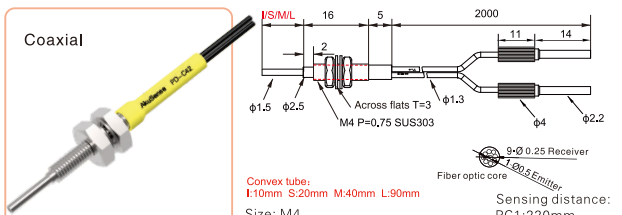


Convex tube:
I:10mm S:20mm M:40mm L:90mm

Size: M4
Minimum bending radius: R15

Sensing distance:
PC1:220mm
PG1:85mm

PD-C62

Coaxial

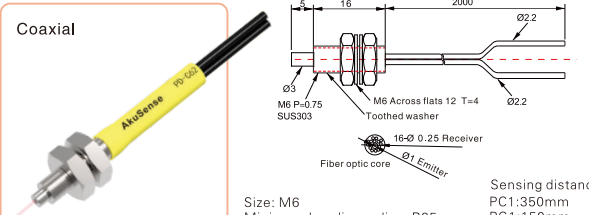


Size: M6
Minimum bending radius: R25

Sensing distance:
PC1:350mm
PG1:150mm

PD-C62-I/S/M/L

Coaxial

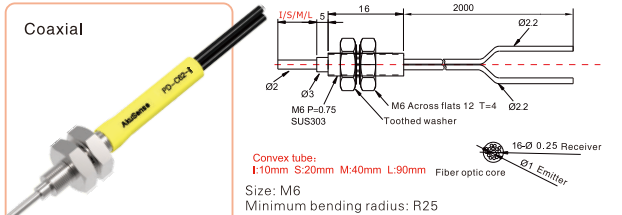

Convex tube:
I:10mm S:20mm M:40mm L:90mm

Size: M6
Minimum bending radius: R25
Sensing distance: 90mm
(Sensing distance varies with different amplifiers)

*PG1: TEGA with a threshold setting of 200;
PC1: 7-step with a threshold setting of 200.
*Cable length listed above can be customized.

Fiber Optic
Slot Sensors
Photoelectric
Laser
Proximity
Displacement
Magnetic
Contact
Area
Ultrasonic
Vision
Code Readers
Vibration
Temperature
Accessories
Guidance

Fiber amplifiers
Economical
Standard
Ultra high speed

Fiber components
Regular type
Array-type
Flat bracket type
Side-view type
High flexible type
High temperature resistant
Small spot type
Combination type
High end type

Fiber lens
Fiber lens


Diffuse reflection

PD-C32TZ

Coaxial



HOT

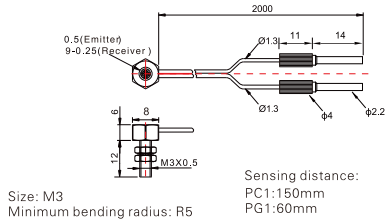


PD-C42TZ

Coaxial




HOT

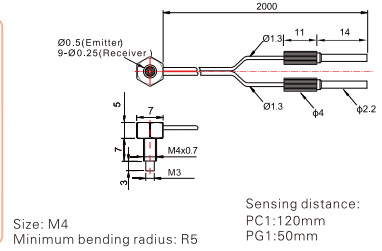

PT-R58V




HOT

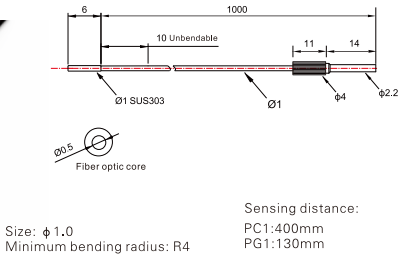

PT-R59




HOT

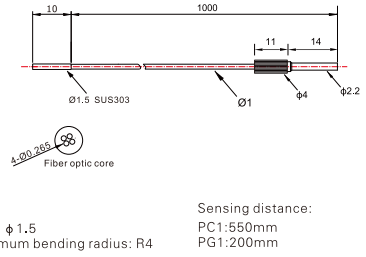

PT-S1520-Q




HOT

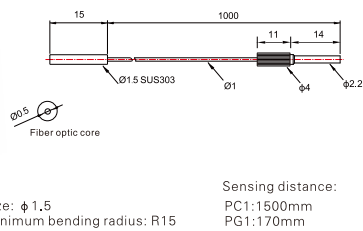

PT-G32



HOT

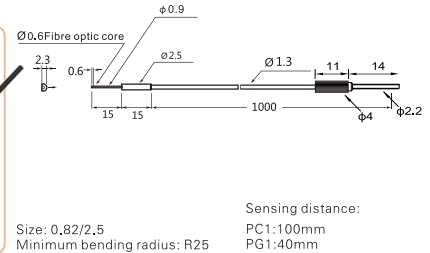

Fiber Optic

- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Code Readers
- Vibration
- Temperature
- Accessories

Guidance

Fiber amplifiers

- Economical
- Standard
- Ultra high speed

Fiber components

- Regular type
- Array-type
- Flat bracket type
- Side-view type
- High flexible type
- High temperature resistant
- Small spot type
- Combination type
- High end type


Fiber lens

- Fiber lens

*PG1: TEGA with a threshold setting of 200;
PC1: 7-step with a threshold setting of 200.
*Cable length listed above can be customized.

Diffuse reflection

PT-S31-Q



Size: $\phi 3$
 Minimum bending radius: R15
 Sensing distance: 140mm
 (Sensing distance varies with different amplifiers)

PT-S31-Q-I/S/M/L




Convex tube:
 I:10mm S:20mm M:40mm L:90mm

Size: $\phi 3$
 Minimum bending radius: R15

Sensing distance:
 PC1:1000mm
 PG1:180mm


PT-32



Size: M3
 Minimum bending radius: R25

Sensing distance:
 PC1:1900mm
 PG1:600mm

PT-32-I/S/M/L

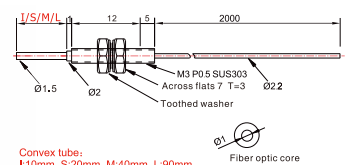


Convex tube:
 I:10mm S:20mm M:40mm L:90mm

Size: M3
 Minimum bending radius: R25


Sensing distance:
 PC1:1900mm
 PG1:700mm

PT-42



Size: M4
 Minimum bending radius: R25
 Sensing distance: 500mm
 (Sensing distance varies with different amplifiers)

PT-42-I/S/M/L




Convex tube:
 I:10mm S:20mm M:40mm L:90mm

Size: M4
 Minimum bending radius: R25

Sensing distance:
 PC1:1800mm
 PG1:400mm


PT-62



Size: M6
 Minimum bending radius: R25

Sensing distance:
 PC1:1400mm
 PG1:600mm

PT-62-I/S/M/L




Convex tube:
 I:10mm S:20mm M:40mm L:90mm

Size: M6
 Minimum bending radius: R25

Sensing distance:
 PC1:4000mm
 PG1:600mm


PT-C32TZ



Size: M3
 Minimum bending radius: R5

Sensing distance:
 PC1:1300mm
 PG1:500mm

PT-C42TZ




Size: M4
 Minimum bending radius: R15

Sensing distance:
 PC1:1500mm
 PG1:600mm

*PG1: TEGA with a threshold setting of 200;
 PC1: 7-step with a threshold setting of 200.
 *Cable length listed above can be customized.

Diffuse reflection


PD-10ML

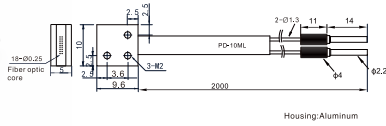

Sensing distance:
PC1:250mm
PG1:80mm

Minimum bending radius: R25
Min-size Detected object: ϕ 0.05mm


PD-15ML-D



Sensing distance:
PC1:200mm
PG1:85mm

Minimum bending radius: R25
Min-size Detected object: ϕ 0.05mm


PD-20ML-S



Sensing distance:
PC1:350mm
PG1:150mm

Minimum bending radius: R25
Min-size Detected object: ϕ 0.05mm



PD-20ML

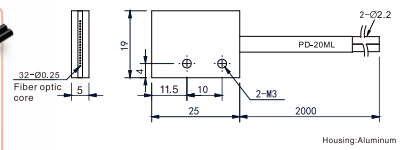

Sensing distance:
PC1:530mm
PG1:140mm

Minimum bending radius: R25
Min-size Detected object: ϕ 0.05mm


PD-25ML



Sensing distance:
PC1:300mm
PG1:150mm

Minimum bending radius: R25
Min-size Detected object: ϕ 2mm

PD-30ML


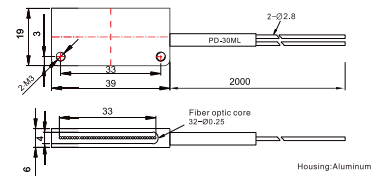


Sensing distance:
PC1:300mm
PG1:150mm

Minimum bending radius: R25
Min-size Detected object: ϕ 4mm

(HOT)



PD-35ML

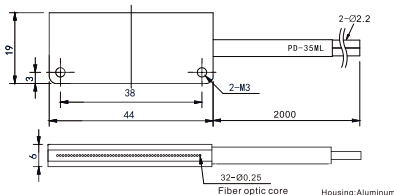

Sensing distance:
PC1:450mm
PG1:120mm

Minimum bending radius: R25
Min-size Detected object: ϕ 6mm


PD-50ML

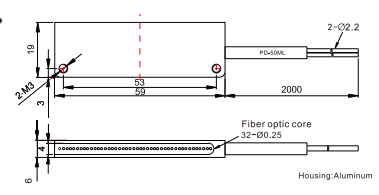

Sensing distance:
PC1:260mm
PG1:130mm

Minimum bending radius: R25
Min-size Detected object: ϕ 10mm

PD-A10

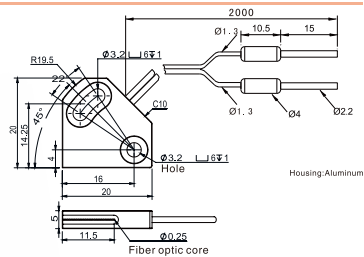

Sensing distance:
PC1:200mm
PG1:95mm

Minimum bending radius: R25
Min-size Detected object: ϕ 0.05mm

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vision

Code Readers

Vibration

Temperature

Accessories

Guidance

Fiber amplifiers

Economical

Standard

Ultra high speed

Fiber components

Regular type

Array-type

Flat bracket type

Side-view type

High flexible type

High temperature resistant

Small spot type

Combination type


High end type

Fiber lens

Fiber lens


Thru-beam

PT-10ML

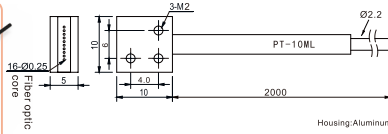



Minimum bending radius: R25
 Min-size Detected object: ϕ 0.1mm
 Sensing distance:
 PC1:1500mm
 PG1:550mm

PT-15ML-D

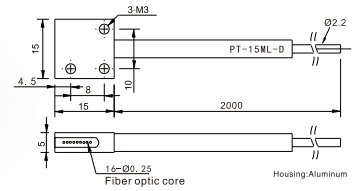



Minimum bending radius: R25
 Min-size Detected object: ϕ 0.5mm
 Sensing distance:
 PC1:1200mm
 PG1:550mm

PT-20ML

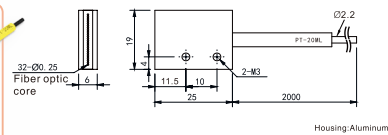



Minimum bending radius: R25
 Min-size Detected object: ϕ 0.5mm
 Sensing distance:
 PC1:1500mm
 PG1:600mm

PT-25ML

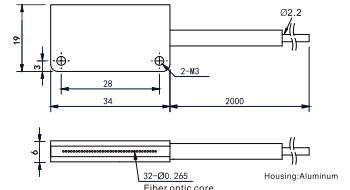



Minimum bending radius: R2
 Min-size Detected object: ϕ 2.0mm
 Sensing distance:
 PC1:1000mm
 PG1:600mm

PT-30ML





(HOT)
 Minimum bending radius: R25
 Min-size Detected object: ϕ 3.0mm
 Sensing distance:
 PC1:3000mm
 PG1:1000mm

PT-35ML





Minimum bending radius: R25
 Min-size Detected object: ϕ 4.0mm
 Sensing distance:
 PC1:1000mm
 PG1:550mm

PT-50ML




Minimum bending radius: R25
 Min-size Detected object: ϕ 5.0mm
 Sensing distance:
 PC1:1100mm
 PG1:600mm

PT-E11M




(HOT)
 Minimum bending radius: R2
 Sensing distance: 3000mm
 Min-size Detected object: ϕ 1.0mm
 (Sensing distance varies with different amplifiers)

PT-120ML



Minimum bending radius: R25
 Min-size Detected object: ϕ 30mm
 Sensing distance:
 PC1:4000mm
 PG1:1200mm

PT-A10





Minimum bending radius: R25
 Min-size Detected object: ϕ 0.05mm
 Sensing distance:
 PC1:3000mm
 PG1:650mm

*PG1: TEGA with a threshold setting of 200;
 PC1: 7-step with a threshold setting of 200.
 *Cable length listed above can be customized.


Diffuse reflection

PD-F41UA

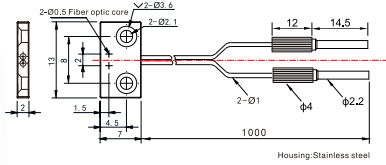



Sensing distance:
 Minimum bending radius: R2 PC1:80mm
 Min-size Detected object: ϕ 0.05mm PG1:30mm

PD-F42UA

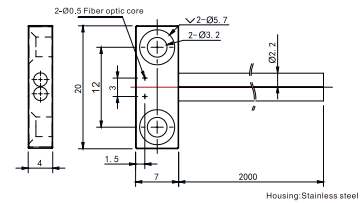


Sensing distance:
 Minimum bending radius: R2 PC1:160mm
 Min-size Detected object: ϕ 0.05mm PG1:120mm

PD-F44UA

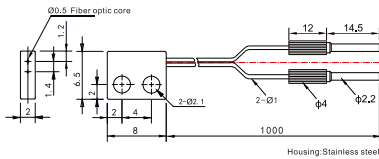

Sensing distance:
 Minimum bending radius: R2 PC1:120mm
 Min-size Detected object: ϕ 0.05mm PG1:55mm



PD-F47UA

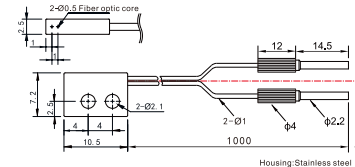

Sensing distance:
 Minimum bending radius: R2 PC1:80mm
 Min-size Detected object: ϕ 0.05mm PG1:25mm



Thru-beam

PT-F51UA





Sensing distance:
 Minimum bending radius: R2 PC1:400mm
 Min-size Detected object: ϕ 0.05mm PG1:130mm

PT-F52UA




Sensing distance: 1900mm
 Minimum bending radius: R2
 Min-size Detected object: ϕ 0.05mm
 (Sensing distance varies with different amplifiers)

PT-F53UA





Sensing distance:
 Minimum bending radius: R2 PC1:210mm
 Min-size Detected object: ϕ 0.05mm PG1:80mm

PT-F54UA

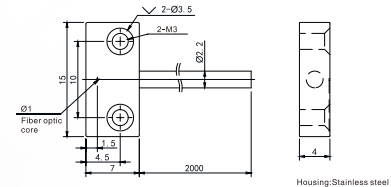



Sensing distance:
 Minimum bending radius: R2 PC1:1300mm
 Min-size Detected object: ϕ 0.05mm PG1:450mm

PT-F57UA



Sensing distance:
 Minimum bending radius: R2 PC1:400mm
 Min-size Detected object: ϕ 0.05mm PG1:100mm

PT-FZ8

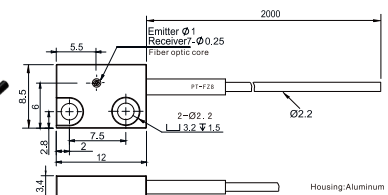

Sensing distance: 120mm
 Minimum bending radius: R15
 Min-size Detected object: ϕ 0.1mm
 (Sensing distance varies with different amplifiers)

*PG1: TEGA with a threshold setting of 200;
 PC1: 7-step with a threshold setting of 200.
 *Cable length listed above can be customized.

Fiber Optic

- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Code Readers
- Vibration
- Temperature
- Accessories

Guidance

- Fiber amplifiers
- Economical
- Standard
- Ultra high speed

Fiber components


- Regular type
- Array-type
- Flat bracket type
- Side-view type
- High flexible type
- High temperature resistant
- Small spot type
- Combination type
- High end type

Fiber lens


- Fiber lens

Diffuse reflection

PD-32-DQ




PD-32-SQ

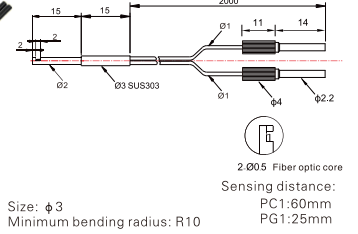


Thru-beam

PT-32-DQ

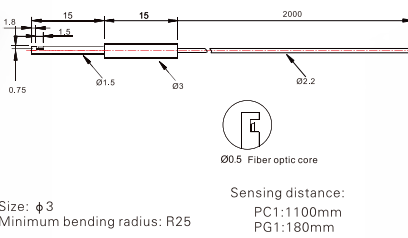

PT-32-SQ

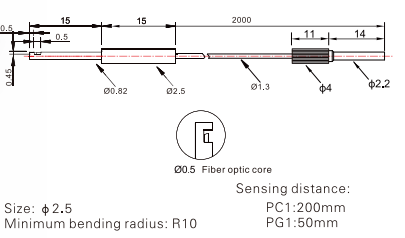

- Fiber Optic
- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Code Readers
- Vibration
- Temperature
- Accessories

Guidance

Fiber amplifiers

- Economical
- Standard
- Ultra high speed

Fiber components

- Regular type
- Array-type
- Flat bracket type
- Side-view type
- High flexible type
- High temperature resistant
- Small spot type
- Combination type
- High end type


Fiber lens

- Fiber lens

*PG1: TEGA with a threshold setting of 200;
PC1: 7-step with a threshold setting of 200.
*Cable length listed above can be customized.


Diffuse reflection

PD-W32-Q




Size: $\phi 3$
 Minimum bending radius: R1
 Sensing distance: PG1:45mm

PD-W48

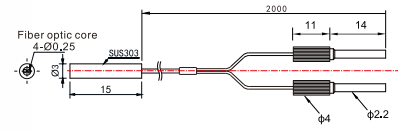


Size: $\phi 3$
 Minimum bending radius: R4
 Sensing distance: 200mm
 (Sensing distance varies with different amplifiers)

PD-W69Y



Size: M3
 Minimum bending radius: R4
 Sensing distance: PC1:110mm
 PG1:25mm


PD-W68

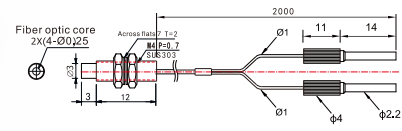

Size: M4
 Minimum bending radius: R4
 Sensing distance: PC1:100mm
 PG1:40mm


Thru-beam

PT-W59





Size: $\phi 1.5$
 Minimum bending radius: R4
 Sensing distance: PC1:350mm
 PG1:100mm

PT-W79



Size: M3
 Minimum bending radius: R4
 Sensing distance: PC1:900mm
 PG1:120mm

PT-W57UF



Size: 6*10.5*2.5
 Minimum bending radius: R4
 Sensing distance: 490mm
 (Sensing distance varies with different amplifiers)

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vision

Code Readers

Vibration

Temperature

Accessories

Guidance

Fiber amplifiers

Economical

Standard

Ultra high speed

Fiber components

Regular type

Array-type

Flat bracket type

Side-view type

High elastic type

High temperature resistant

Small spot type

Combination type

High end type


Fiber lens

Fiber lens

*PG1: TEGA with a threshold setting of 200;
 PC1: 7-step with a threshold setting of 200.
 *Cable length listed above can be customized.


Diffuse reflection

PD-H42Y

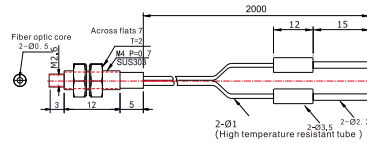


Size: M4
 Max. temperature: 105°C
 Sensing distance: 160mm
 (Sensing distance varies with different amplifiers)

PD-H62Y

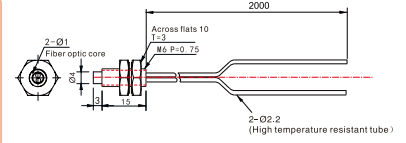


Size: M6
 Max. temperature: 105°C
 Sensing distance: 230mm
 (Sensing distance varies with different amplifiers)

PD-H41E/H42E




Size: M4
 Max. temperature: 200°C
 Sensing distance:
 PC1:350mm
 PG1:150mm

PD-H61E/H62E

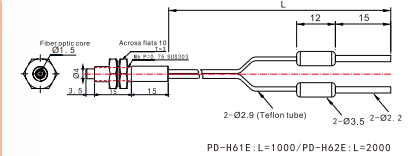

Size: M6
 Max. temperature: 200°C
 Sensing distance: 190mm/180mm
 (Sensing distance varies with different amplifiers)


PD-H41S/H42S

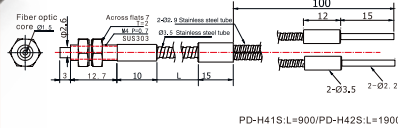

Size: M4
 Max. temperature: 350°C

Sensing distance:
 PC1:300mm
 PG1:150mm

PD-H61S/H62S

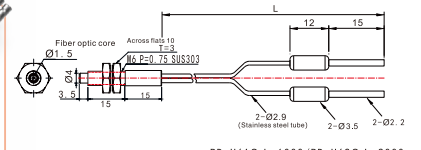


Size: M6
 Max. temperature: 350°C
 Sensing distance: 190mm/180mm

Sensing distance:
 PG1:150mm

Thru-beam



PT-H42Y

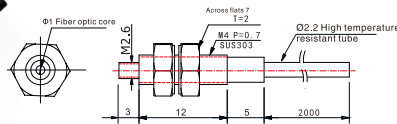

Size: M4
 Max. temperature: 105°C

Sensing distance:
 PC1:2300mm
 PG1:700mm


PT-H41E/H42E



Size: M4
 Max. temperature: 200°C
 Sensing distance: 450mm/390mm
 (Sensing distance varies with different amplifiers)



PT-H41S/H42S

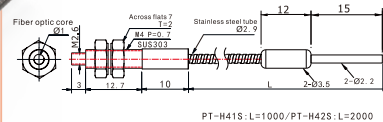


Size: M4
 Max. temperature: 350°C

Sensing distance:
 PC1:1500mm
 PG1:600mm

*PG1: TEGA with a threshold setting of 200;
 PC1: 7-step with a threshold setting of 200.
 *Cable length listed above can be customized.

PD-X20

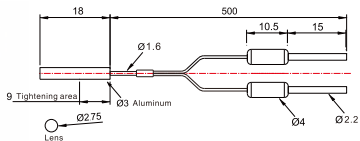


Size: $\phi 3$
 Minimum bending radius: R25
 Focal distance: 5mm

Sensing distance:
 PC1:25mm
 PG1:20mm

HOT

Combination type Fiber components

PD-S4Q3-30

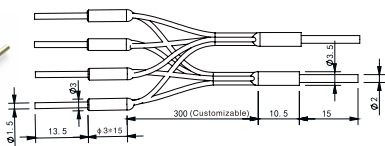


Size: $\phi 3$
 Fiber optic sensor heads: 4 Units

Sensing distance:
 PC1:250mm
 PG1:150mm

Customizable

PD-S10Q1.5-100

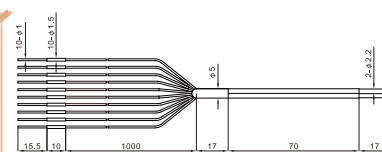

Size: $\phi 1.5$
 Fiber optic sensor heads: 10 Units

Sensing distance:
 PC1:80mm
 PG1:20mm

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vision

Code Readers

Vibration

Temperature

Accessories

Guidance

Fiber amplifiers

Economical

Standard

Ultra high speed

Fiber components

Regular type

Array-type

Flat bracket type

Side-view type

High flexible type

High temperature resistant

Small spot type

Combination type


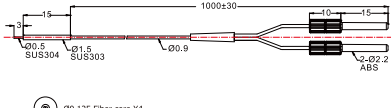
High end type

Fiber lens

Fiber lens

Diffuse reflection


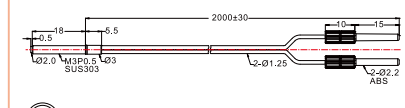
PD-R15

HOT

Size: ϕ 1.5
 Minimum bending radius: R10
 Sensing distance: 4.8mm
 (Sensing distance varies with different amplifiers)


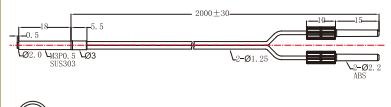
PD-R32

HOT

Size: M3
 Minimum bending radius: R15
 Sensing distance: PC1:240mm


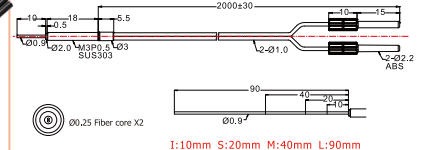
PD-RC32

HOT

Size: M3
 Minimum bending radius: R15
 Sensing distance: PC1:250mm
 PG1:75mm

PD-RE32-I/S/M/L


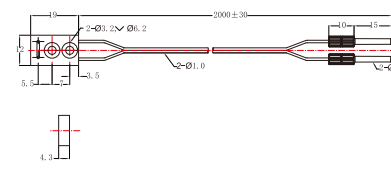



HOT

Size: M3
 Minimum bending radius: R15
 Sensing distance: 10mm
 (Sensing distance varies with different amplifiers)

I:10mm S:20mm M:40mm L:90mm


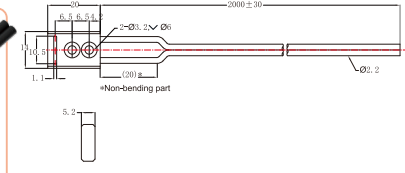
PD-R38V

HOT

Minimum bending radius: R10
 Sensing distance: 0-4mm
 (Sensing distance varies with different amplifiers)


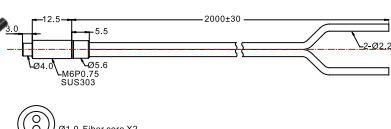
PD-R38L

HOT

Minimum bending radius: R25
 Sensing distance: 8-32mm
 (Sensing distance varies with different amplifiers)



PD-R62

HOT

Size: M6
 Minimum bending radius: R25
 Sensing distance: PC1:400mm
 PG1:180mm

PD-R62TE


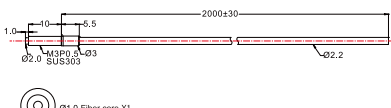


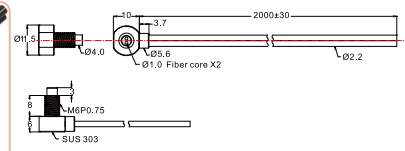
HOT

Size: M6
 Minimum bending radius: R2
 Sensing distance: 140mm
 (Sensing distance varies with different amplifiers)

Thru-beam


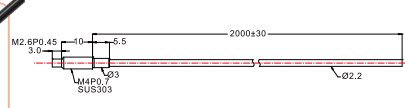
PT-R32

HOT

Size: M3
 Minimum bending radius: R25
 Sensing distance: 1000mm
 (Sensing distance varies with different amplifiers)

PT-R42


HOT

Size: M4
 Minimum bending radius: R25
 Sensing distance: PC1:2200mm
 PG1:500mm


Fiber Optic
Slot Sensors
Photoelectric
Laser
Proximity
Displacement
Magnetic
Contact
Area
Ultrasonic
Vision
Code Readers
Vibration
Temperature
Accessories
Guidance
Fiber amplifiers
Economical
Standard
Ultra high speed
Fiber components
Regular type
Array-type
Flat bracket type
Side-view type
High flexible type
High temperature resistant
Small spot type
Combination type
High end type
Fiber lens
Fiber lens

Diffuse reflection

PF-5D



Housing:aluminum
Lens:glass




Diameter of beam: ϕ 0.5-3
Suit to M3 diameter fiber optic sensor
Focal distance: 8-30mm

PF-3D



Housing:aluminum
Lens:plastic




Size of pointed end: ϕ 4.3
Diameter of beam: Approx. ϕ 4 (Sensing distance: 0-20mm)
Suit to M3 diameter fiber optic sensor

PF-2D



Housing:aluminum
Lens:plastic




Size of pointed end: ϕ 4.3
Diameter of beam: Approx. ϕ 0.4
Suit to M3 diameter fiber optic sensor
Focal distance: 7 \pm 2mm

PF-4D



Housing:aluminum
Lens:glass




Size of pointed end: ϕ 7.4
Diameter of beam: Approx. ϕ 0.5
Suit to M3 diameter fiber optic sensor
Focal distance: 15 \pm 2mm

PF-6D



Housing:aluminum
Lens:glass



Size of pointed end: ϕ 10.6
Diameter of beam: Approx. ϕ 2.0
Suit to M3 diameter fiber optic sensor
Focal distance: 35 \pm 2mm

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vision

Code Readers

Vibration

Temperature

Accessories

Guidance

Fiber amplifiers

Economical

Standard


Ultra high speed

Thru-beam

PF-4T



Housing:aluminum
Lens:glass



Size of pointed end: ϕ 4.3
Suit to M2.6 diameter fiber optic sensor
Max.sensing distance: 3600mm

PF-2T



Housing:nickle plated brass
Lens:glass




Size of pointed end: ϕ 4
Suit to M2.6 diameter fiber optic sensor
Max.sensing distance: 3600mm

PF-5T




Housing:aluminum
Lens:glass



Suit to M2.6 diameter fiber optic sensor
Max.sensing distance: 3600mm

PF-1T



Housing:nickle plated brass
Lens:acrylic



Size of pointed end: ϕ 4
Suit to M2.6 diameter fiber optic sensor
Max.sensing distance: 3600mm

Fiber components

Regular type

Array-type

Flat bracket type

Side-view type

High flexible type

High temperature resistant

Small spot type

Combination type

High end type

Fiber lens

Fiber lens